

BDL-375

Ultraviolet Picosecond Diode Laser

Pulse width down to 60 ps

Repetition rate 20-50-80 MHz

Wavelength 375 nm



Low skew trigger output

Extremely low RF noise

Cooled laser diode

Simple + 9 V to +12V power supply

Compact design - no external controller unit

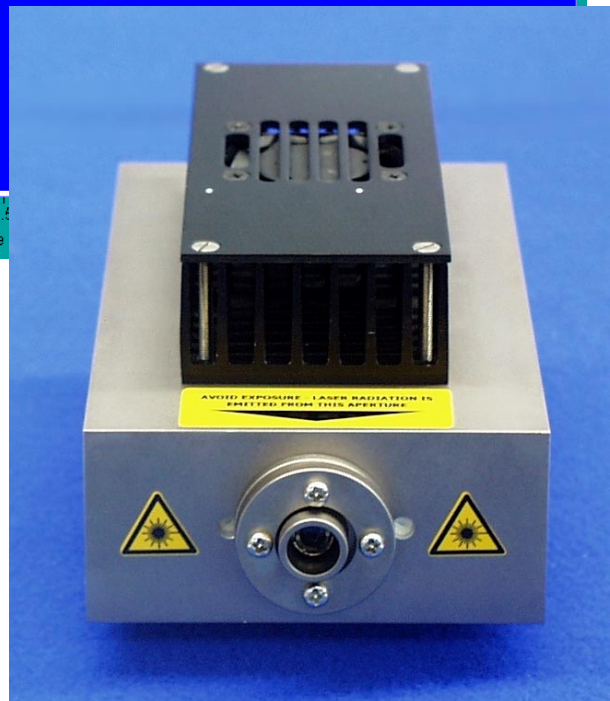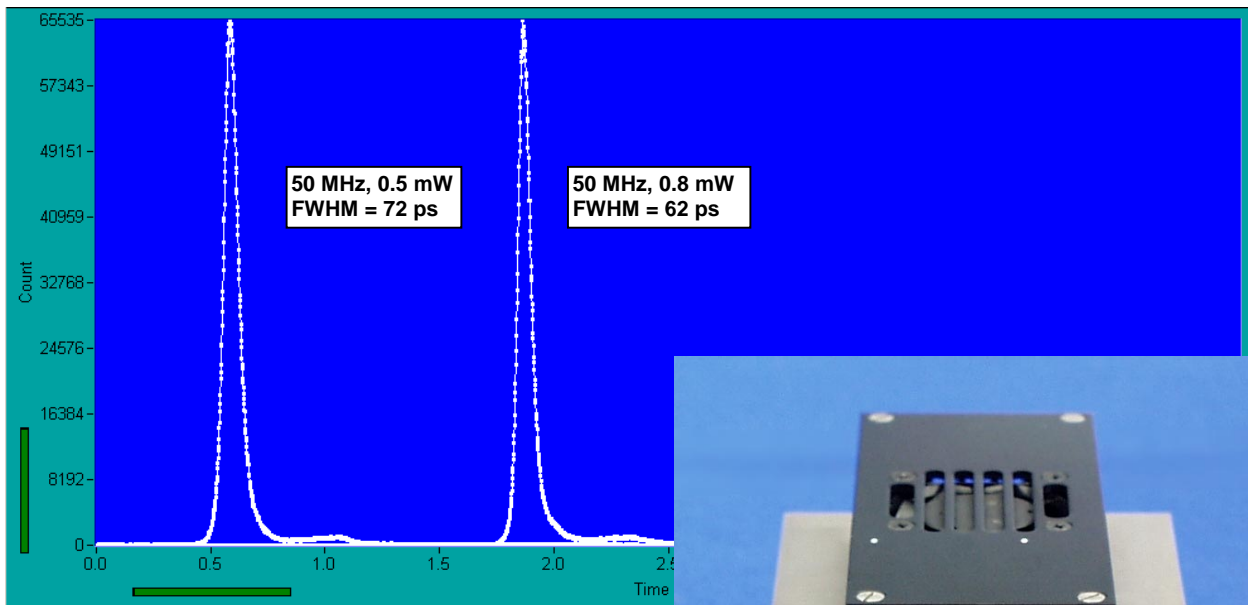

Luminescence lifetime experiments
Picosecond lifetime microscopy
Fluorescence correlation
Time-correlated single photon counting experiments



Becker & Hickl GmbH
Nahmitzer Damm 30
12277 Berlin, Berlin
Tel. +49 / 30 / 787 56 32
Fax. +49 / 30 / 787 57 34
email: info@becker-hickl.com
www.becker-hickl.com



US Representative:
Boston Electronics Corp
tcspc@boselec.com
www.boselec.com



UK Representative:
Photonic Solutions PLC
sales@psplc.com
www.psplc.com

BDL-375

Optical

Repetition Rate	20-50-80 MHz, selectable
Wavelength	370 nm to 380 nm, typ. 375 nm
Pulse Width (FWHM, Power 0.5 mW, 50 MHz)	60 to 90 ps
Peak Power	125 mW ¹⁾
Optical Power	20 MHz: 0.1 mW to 0.3 mW ²⁾
(Average or CW-equivalent power, adjustable)	50 MHz: 0.2 mW to 0.8 mW ²⁾
	80 MHz: 0.3 mW to 0.8 mW ²⁾
Stability of Repetition Rate	± 100 ppm
Pulse-to-Pulse Jitter	< 10 ps
Power and pulse shape stabilisation after 'Laser on' signal	1 µs
Power and pulse shape stabilisation after switch-on	3 min

Trigger Output

Pulse Amplitude	+100 mV (peak) into 50 Ω
Pulse Width	1 ns
Output Impedance	50 Ω
Connector	SMA
Delay from Trigger to Optical Pulse	< 500 ps
Jitter between Trigger and Optical Pulse	< 10 ps

Control Inputs

Frequency 20 MHz	TTL / CMOS high ³⁾
Frequency 50 MHz	TTL / CMOS high ³⁾
Frequency 80 MHz	TTL / CMOS high ³⁾
/Laser Off	TTL / CMOS low ³⁾
External Bias Input	analog input, -10 V to +10V

Power Supply

Power Supply Voltage	+ 9 V to +12 V
Power Supply Current	300 mA to 1 A ⁴⁾
Power Adapter	AC-DC power adapter, with key switch and control box in cable

Mechanical Data

Dimensions	160 mm x 90 mm x 60 mm
Mounting Thread	two M6 holes

Maximum Values

Power Supply Voltage	0 V to +15 V
Voltage at Digital Control Inputs	-2 V to +7 V
Voltage at Ext. Bias Input	-12 V to +12 V
Ambient Temperature	0 °C to 30 °C ⁵⁾

1) Typical values, sample tested. Depends on pulse width and selected power.

2) Recommended power adjust range. Lower power gives broader pulses, higher power gives ringing in pulse shape. Power levels above the given range can be selected, but may impair the lifetime of the laser diode.

3) All inputs have 10 kΩ pull-up resistors. Open input is equivalent to logic 'high'.

4) Dependent on ambient temperature. Cooling current changes due to temperature regulation of laser diode


5) Operation below 13 °C may result in unstable power or extended warm-up time.



Caution: Class 3B laser product. Avoid exposure to beam. Light emitted by the device may be harmful to the human eye and skin. Please obey laser safety rules when operating the devices. Complies with US federal laser product performance standards.

Application: TCSPC lifetime imaging with laser scanning microscopes

The BDL-375 laser excites the sample with 50 MHz, 75 ps pulses. The microscope scans the sample in y-x direction, and the SPC-830 TCSPC imaging module records the photon distribution versus time and the coordinates of the scanning area. The setup detects single and double exponential lifetimes down to a few 10ps. Typical applications are ion concentration, pH, or oxygen saturation measurements by fluorescence quenching, FRET experiments and distinguishing of autofluorescence components. Please see www.becker-hickl.com for detailed information.

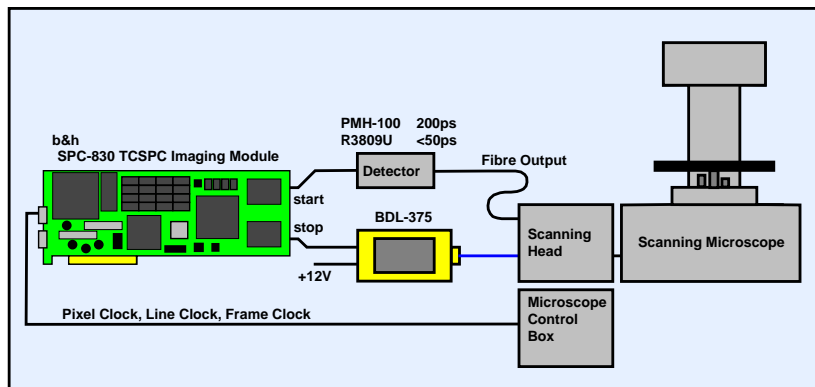

Becker & Hickl GmbH
 Nahmitzer Damm 30
 12277 Berlin
 Tel. +49 / 30 / 787 56 32
 Fax. +49 / 30 / 787 57 34
<http://www.becker-hickl.com>
 email: info@becker-hickl.com